



# FINE PIPE HEATER

細配管用ヒーター

Temperature at a glance!

## WAN heater

Detachable to metal pipes, tubes, etc.

Heater for heating and heat insulation

1 1/8-1 inch Fine pipe heater

### Features

- Easily attach and detach to and from the pipes and tubes.
- Equipped with an insulation material for effective warming
- Can also be mounted in complex shapes.

Temperature drops in the pipe and tube.

Heat Resistant 150°C/392°F

RoHS2 Compliance


Simply clip them on velcro





Easy attachment/detachment



Easily wrap on a flexible L shape

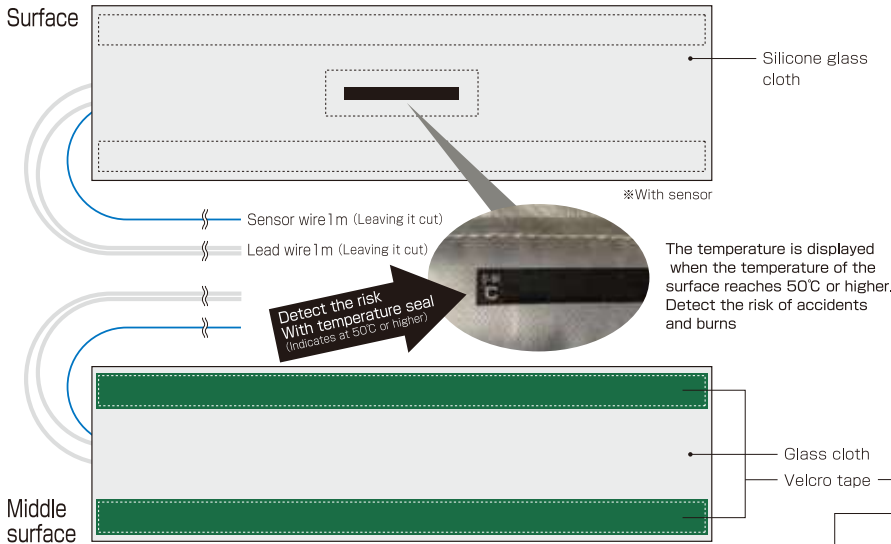

We have two sizes. Choose according to your use.

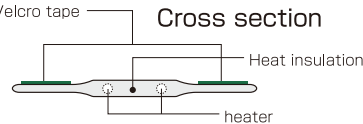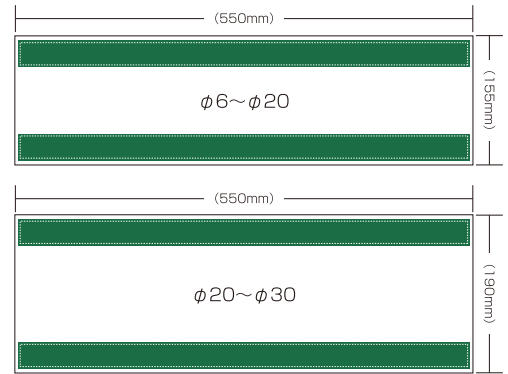

Without sensor 100V rating

Product code	Conformance size	Wattage	size(mm×mm)	Lead wire
WNS-10	(φ6~φ20) 1/8~3/4 inch	10	155×550	1m
WNS-20		20		
WNL-20	(φ20~φ30) 1 inch	20	190×550	
WNL-40		40		


With sensor 100V rating

Product code	Conformance size	Wattage	size(mm×mm)	Lead wire
WNS-10-K	(φ6~φ20) 1/8~3/4 inch	10	155×550	1m
WNS-20-K		20		
WNL-20-K	(φ20~φ30) 1 inch	20	190×550	
WNL-40-K		40		

### [Precautions for use]

- Do not operate above the rated voltage.
- The product is not waterproof. Avoid usage at a water splashing place.
- Be sure to provide a ground.
- This product is not explosion-proof. Avoid usage in an explosion-proof area.
- Do not touch the main unit while it is energized.
- There is a risk of burns.
- Do not use the product in an atmosphere containing flammable, combustible or corrosive gases.
- Do not disassemble or modify this product.
- Do not pull on the power cable or thermocouple.

### Surface temperature in the air

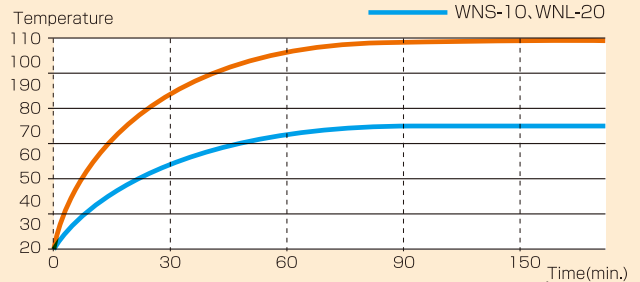

※Measured the heater itself in the air at room temperature.(20°C)  
 ※The surface temperature of the heater changes depending on the operating environment, the material of the heating object, shapes, etc.

### Temperature control

Analog type/Suitable for simple temperature control  
 (0 to 100°C variable knob type)  
 Digital type/Suitable for more accurate temperature control  
 (0 to 999°C variable button type)



株式会社スリーハイ  
 THREE HIGH CO.,LTD.

Web: [www.threehigh.com](http://www.threehigh.com)  
 Mail: [info\\_overseas@threehigh.co.jp](mailto:info_overseas@threehigh.co.jp)

Headquarters/Factory

4-42-16 Higashiyamata, Tsuzuki Ward, Yokohama City, Kanagawa 224-0023 JAPAN  
 TEL: +81-45-590-5561 FAX: +81-45-590-5571

