FINE PIPE HEATER
細配管用ヒーター

Temperature at a glance!

WANI heater

Detachable to metal pipes, tubes, etc.
Heater for heating and heat insulation

11/8-1 inch　Fine pipe heater

Temperature drops in the pipe and tube.

Heat Resistant 150℃/392F°

RoHS2 Compliance

Simply clip them on velcro

Easy attachment/detachment

Easily wrap on a flexible L shape

Features

- Easily attach and detach to and from the pipes and tubes.
- Equipped with an insulation material for effective warming
- Can also be mounted in complex shapes.

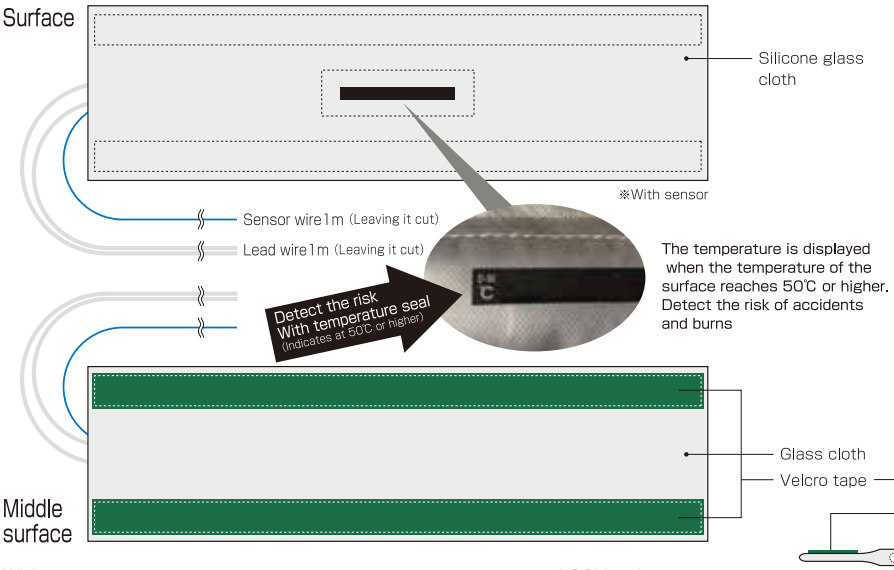

We have two sizes. Choose according to your use.

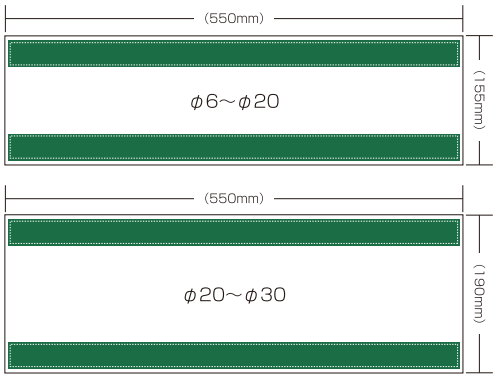

Cross section

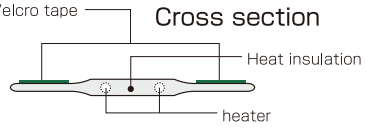

Without sensor　100V rating

Product code	Conformance size	Wattage	size(mm×mm)	Lead wire
WNS-10	(φ6～φ20) 1/8～3/4 inch	10	155×550	1m
WNS-20		20		
WNL-20	(φ20～φ30) 1 inch	20	190×550	
WNL-40		40		

With sensor　100V rating

Product code	Conformance size	Wattage	size(mm×mm)	Lead wire	
WNS-10-K	(φ6～φ20) 1/8～3/4 inch	10	155×550	1m	1m
WNS-20-K		20			
WNL-20-K	(φ20～φ30) 1 inch	20	190×550		
WNL-40-K		40			

Surface temperature in the air

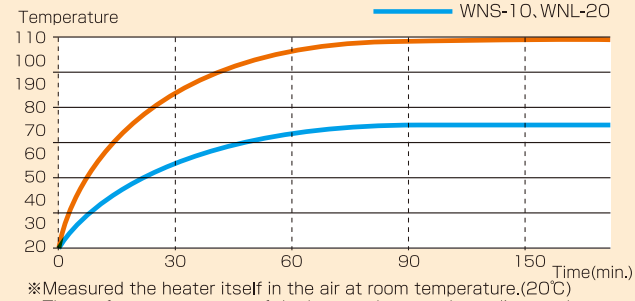

※Measured the heater itself in the air at room temperature.(20℃)
※The surface temperature of the heater changes depending on the operating environment, the material of the heating object, shapes, etc.

Temperature control

Analog type/Suitable for simple temperature control
(0 to 100℃ variable knob type)
Digital type/Suitable for more accurate temperature control
(0 to 999℃ variable button type)

[Precautions for use]

- Do not operate above the rated voltage.
- The product is not waterproof. Avoid usage at a water splashing place.
- Be sure to provide a ground.
- This product is not explosion-proof. Avoid usage in an explosion-proof area.
- Do not touch the main unit while it is energized.
- There is a risk of burns.
- Do not use the product in an atmosphere containing flammable, combustible or corrosive gases.
- Do not disassemble or modify this product.
- Do not pull on the power cable or thermocouple.

株式会社スリーハイ
THREE HIGH CO.,LTD.
Web: www.threehigh.jp/en/
Mail : info_overseas@threehigh.co.jp
Headquarters/Factory 4-42-16 Higashiyamata, Tsuzuki Ward, Yokohama City, Kanagawa 224-0023 JAPAN
TEL: +81-45-590-5561 FAX: +81-45-590-5571